

Vulite®

6" TC REMODEL HOUSING

INCANDESCENT LAMPS

V6TCR W

Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

PRODUCT DESCRIPTION

TC Remodel Housing designed for use in non-insulated areas • If installed where insulation is present, the insulation must be pulled back 3" from all sides of the TC housing • In Canada, when insulation is present, type IC fixture must be used • TC Remodel Housing for remodel application where back side of ceiling is not accessible • Installs through an opening in the ceiling from below • Secured in place by factory installed remodel springs.

PRODUCT SPECIFICATIONS

Lamp Lamp ratings based on trim selected—see reverse.

Socket Medium base porcelain socket with nickel-plated copper screw shell • Adjustable socket bracket and detachable socket with snap-in springs to accommodate various lamp and trim combinations • Shipped with socket cap to protect against paint overspray.

Trims Trim selection shown on reverse.

Labels UL/cUL listed for through-branch wiring, damp locations and IP • Product thermally protected against improper use of lamps or insulation • UL/cUL Listed • Trims V3020, V3040N and V3041 are wet location approved for covered ceiling applications • Trims V3034 and V3037 are wet location approved for covered ceiling applications, **when used with outdoor rated lamps.**

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.



Specifications subject to change without notice.

INSTALLATION

Junction Box Pre-wired junction box, UL/cUL listed • Junction box provided with removable access plate, (5) 1/2" knockouts, (4) Non-metallic sheathed cable connectors and ground wire • Knockouts equipped with pryout slots • Push-in electrical connectors included.

Housing TC housing, .028" aluminum • Remodel springs accommodate up to 1" ceiling thickness.

DIMENSIONS

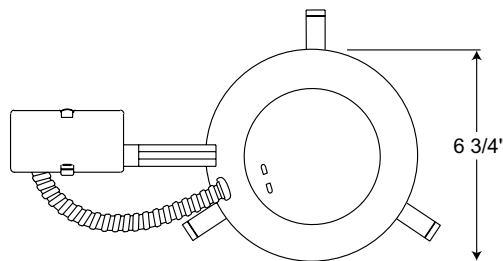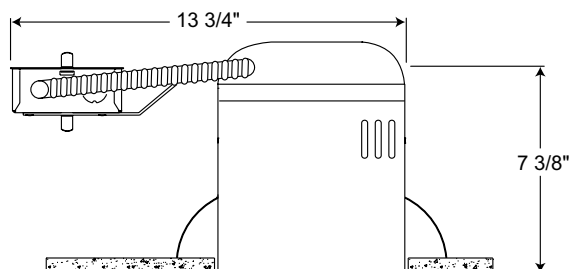

6 1/4" CEILING CUTOUT

PRODUCT CODES

| Catalog No. | Input Voltage | Lamp Rating (max.) |
|-------------|---------------|--|
| V6TCR W | 120V | A19/PAR30/PAR30L/BR30/BR40/PAR38 (See reverse for max. trim rating) |

6" TC REMODEL HOUSING

INCANDESCENT LAMPS

V6TCR W

TRIMS/LAMPS

| | Cat. No. | Description | Max. Lamp Rating |
|---|---------------------|--|---|
|  | V3024 WWH | Conical White Baffle | 75W PAR30, 75W PAR30L, 65W BR30 |
| | V3024 BWH | Conical Black Baffle | 120W BR40 |
|  | V3025 WWH | Straight White Baffle | 75W PAR30, 75W PAR30L, 65W BR30 |
| | V3025 BWH | Straight Black Baffle | 120W BR40, 120W PAR38 |
|  | V3034 WWH◆◆ | Full White Baffle | 60W A19 (white only), 75W PAR30, 75W PAR30L, |
| | V3034 BWH◆◆ | Full Black Baffle | 85W BR30, 120W BR40, 150W PAR38 (white only), |
|  | V3034T WWH◆◆ | Full White Baffle with Torsion Springs | 75W PAR38 (black max.) |
| | V3034T BWH◆◆ | Full Black Baffle with Torsion Springs | |
|  | V3027 CWH | Clear Cone | 75W PAR30, 75W PAR30L, 65W BR30 |
| | | | 90W BR40 |
|  | V3037 WWH◆◆ | Full White Cone | 60W A19, 75W PAR30, 75W PAR30L |
| | V3037T WWH◆◆ | Full White Cone with Torsion Springs | 85W BR30, 120W BR40, 150W PAR38 |
|  | V3029 WH | White Eyeball | 75W PAR30, 75W PAR30L, 65W BR30 |
|  | V3020 PW◆ | Stippled Opal Lens Shower | 40W A19, 75W PAR30, 75W PAR30L |
| | | | 65W BR30, 75W PAR38 |
|  | V3040N PW◆ | Stippled Opal Lens Shower with Reflector | 75W A19 |
|  | V3041 PW◆ | Drop Opal Lens Shower with Reflector | 100W A19 |
|  | V3050 WH | Open Frame | 65W BR30 |

Trim Size: 7 $\frac{3}{4}$ " O.D. (except Cat. Nos. V3034, V3037 - 7 $\frac{5}{8}$ " O.D., Cat. Nos. V3020, V3040N, V3041, V3050 - 8" O.D.).

Trim Finish: PW - Plastic White (Polycarbonate material shower trim), WH - White.

Note: In Canada when insulation is present, Type IC fixtures must be used.

◆ UL/cUL Listed for use in wet location.

◆◆ UL/cUL Listed for use in wet location with outdoor rated lamp.