



CCEL Series

CHICAGO EDGE-LIT EXIT SIGN

DATE: _____ LOCATION: _____

TYPE: _____ PROJECT: _____

CATALOG #: _____

FEATURES

- Quick installation
- Full recharge within 24 hours
- AC-on and test switch
- Fully automatic two-stage charger
- Surface or Recessed models with STAIRS or EXIT



Recessed Ceiling Mount

Surface Mount

RELATED PRODUCTS

- CLS Series - Emergency Light
- CLSC Series - Combination Exit/Emergency Light



SPECIFICATIONS

APPLICATION

- The CCEL Series is approved for use in the City of Chicago and can be configured with STAIRS or EXIT to include the directional arrow

CONSTRUCTION

- The surface mount housing is made of extruded aluminum and the recessed in 20 gage steel with satin aluminum or white finish
- The surface mount design can be top, end or ceiling mounted by use of a supplied canopy

INSTALLATION

- The recessed design can be ceiling or wall mounted by selection and includes a back-box
- CCEL Recessed Bar Hanger Kit required for use with CCELR recessed exit when installing in T-Grid ceiling applications

ILLUMINATION

- The CCEL Series offers bright, even and highly reliable LED illumination with direction configurable STAIRS or EXIT acrylic panels

COMPLIANCES

- City of Chicago
- UL Listed for Damp Locations (0C° to 50°C)
- NFPA101
- NEC
- OSHA

WARRANTY

- 5 year full unit warranty



CCEL Series

CHICAGO EDGE-LIT EXIT SIGN

DATE: _____ LOCATION: _____

TYPE: _____ PROJECT: _____

CATALOG #: _____

ORDERING GUIDE

Example: CCELSWE-NP

CATALOG #

CCEL					Panel Code
Model	Mounting Type	Faces	Operation	Finish Color	
CCEL Chicago Edge-Lit Exit Sign	S Surface	S Single	A AC Only	A Aluminum	Single Face Models 3 "EXIT" (no arrows) 6 "EXIT" (right arrow) 9 "EXIT" (left arrow) 12 "EXIT" (double arrow) 2 "STAIRS" (no arrows) 5 "STAIRS" (right arrow) 8 "STAIRS" (left arrow) 11 "STAIRS" (double arrow) Double Face Models 18 "EXIT" (no arrows) 21 "EXIT" (right / left arrow) 24 "EXIT" (double arrow) 17 "STAIRS" (no arrows) 20 "STAIRS" (right / left arrow) 23 "STAIRS" (double arrow)
	R Recessed Ceiling	D Double	E Emergency	W White	
	W Recessed Wall				

Accessories

CCELR-BHK CCEL Recessed Bar Hanger Kit*

Note
* Required for use with CCELR recessed exit when installing in T-Grid ceiling applications

STOCKED OPTIONS

HOUSING

Catalog Number	Description
CCELSWA-NP	Surface, AC, White, No Panel
CCELSWE-NP	Surface, EM, White, No Panel
CCELSWA-NPS	STAIRS, Surface, AC, White, No Panel
CCELSWE-NPS	STAIRS, Surface, EM, White, No Panel
CCELRWA-NP	Recessed, AC, White, No Panel
CCELRWE-NP	Recessed, EM, White, No Panel
CCELRWA-NPS	STAIRS, Recessed, AC, White, No Panel
CCELRWE-NPS	STAIRS, Recessed, EM, White, No Panel
CCELR-WALLKIT	Recessed Wall Mount Kit(EXIT)
CCELR-WALLKIT-STAIRS	Recessed Wall Mount Kit(STAIRS)

Notes:
1. Housing Size is different for EXIT or STAIRS
2. The recessed wall-mount kit is specific for EXIT or STAIRS. Ensure correct selection.
3. Order appropriate housing, then order corresponding panel shown below

PANEL


Catalog Number	Description
CEP3-ENA	EXIT panel, no arrow
CEP6-ERA	EXIT panel, Right Arrow
CEP9-ELA	EXIT panel, Left Arrow
CEP12-EDA	EXIT panel, Double Arrow
CEP18-ENA	Double Face EXIT panel, no Arrow
CEP24-EDA	Double Face EXIT panel, Double Arrow
CEP21-ELARA	Double EXIT panel, Left/Right Arrow
CEP2-SNA	STAIRS panel, no arrow
CEP5-SRA	STAIRS panel, Right Arrow
CEP8-SLA	STAIRS panel, Left Arrow
CEP11-SDA	STAIRS panel, Double Arrow
CEP17-SNA	Double Face STAIRS panel, no Arrow
CEP23-SDA	Double Face STAIRS panel, Double Arrow
CEP20-SLARA	Double Face STAIRS panel, Left/Right Arrow

INPUT POWER REQUIREMENTS


	Input Watts (W)		Input Amps (A)	
	120VAC	277VAC	120VAC	277VAC
AC Models	4.3	4.7	0.040A	0.02A
Emergency Models	4.5	4.9	0.042A	0.02A

SPECIFICATIONS

Single-Face Selections

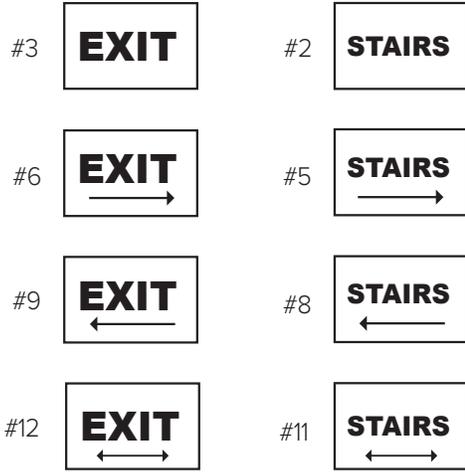


Double-Face Selections

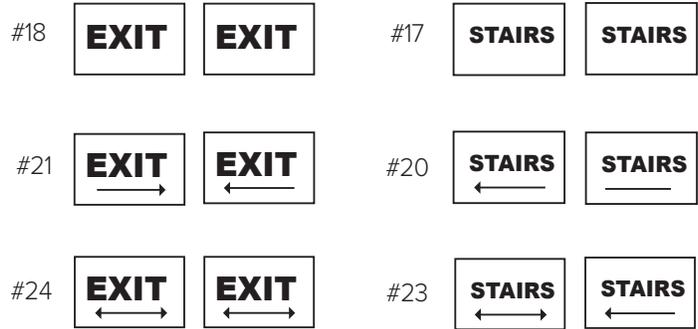


DIMENSIONS

RECESSED MODEL

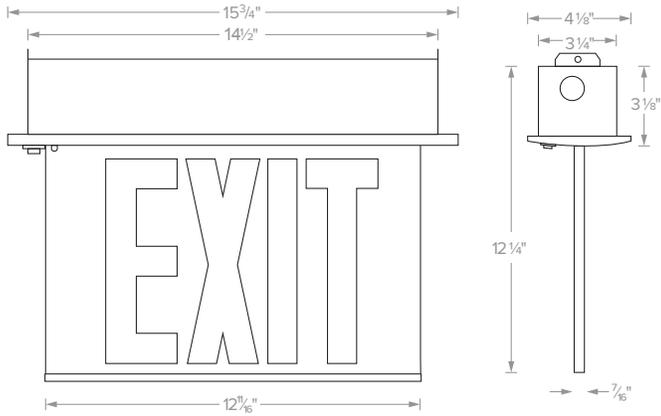

WALL MOUNT MODEL

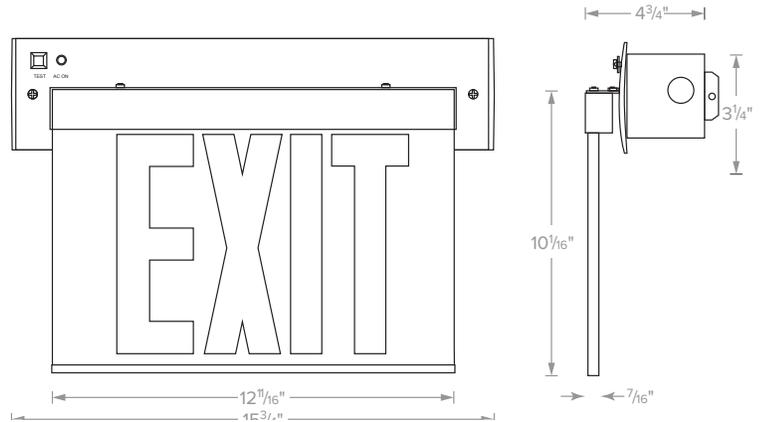

SURFACE MOUNT MODEL

