

Galvanized Rigid Conduit (GRC) 45° Elbows




Features:

- Hot-dip galvanized for excellent corrosion resistance
- High strength ductile steel for long life and easy bending
- Smooth, continuous raceways for fast wire-pulling
- Kwik-Release End Cap to protect threads
- Listed to Safety Standard UL 6
- Manufactured in accordance with ANSI C80.1

Standards:

- Available in trade sizes 1/2" (16 mm) - 6" (155 mm)
- Precision manufacturers for dependable, long-lasting value and ultimate protection for electrical conductors
- Highly resistant to damage from impact (Article 344 NEC)
- Recognized as equipment grounding conductor (Sec 250.118 NEC)
- UL Safety Standard 6

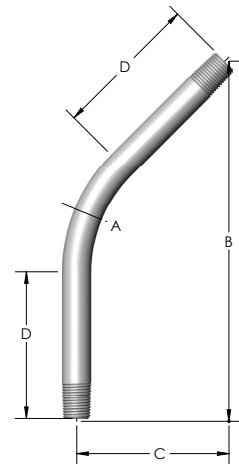

Galvanized Rigid Conduit (GRC) 45° Elbows

Listed to Safety Standard UL 6

Manufactured in accordance with ANSI C80.1



Trade Size	Metric Designator	Radius (A) ¹		Offset (B) ²		Offset (C) ²		Straight (D) ¹		Approximate Weight Per 100 Pieces		Standard Package
		(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(lb)	(kg)	
1/2	16	4	102	7	178	2 7/8	73	1 1/2	38	55	24.9	50
3/4	21	4 1/2	114	7 7/8	200	3 1/4	83	1 1/2	38	82	37.2	50
1	27	5 3/4	146	9 5/8	244	4	102	1 7/8	48	148	67.1	25
1 1/4	35	7 1/4	184	11 1/8	283	4 5/8	117	2	51	232	105.2	20
1 1/2	41	8 1/4	210	13 3/8	333	5 3/8	137	2	51	329	149.2	15
2	53	9 1/2	241	15 3/4	400	6 1/2	165	2	51	525	238.1	10
2 1/2	63	10 1/2	267	17 1/2	445	7 1/4	184	3	76	932	422.8	1
3	78	13	330	21 7/8	556	9	229	3 1/8	79	1515	687.2	1
3 1/2	91	15	381	26 1/8	664	10 7/8	276	3 1/4	83	2200	997.9	1
4	103	16	406	26 1/4	667	10 7/8	276	3 3/8	86	2575	1168.0	1
5	129	24	610	35 7/8	911	14 7/8	378	3 5/8	92	4783	2169.6	1
6	155	30	762	43 3/8	1102	18	457	3 3/4	95	7590	3442.8	1

¹ Minimum requirement as per UL Standard

² For information only, not a requirement as per UL Standard

Sizes 2 1/2" (63 mm) and larger shipped in palletized bulk cartons

Also available in the following Degrees (90°, 60°, 30°, 22 1/2°, 15° & 11 1/4°)

