



Color: Bronze

Weight: 2.3 lbs

Project:

Type:

Prepared By:

Date:

**Driver Info**

|             |                  |
|-------------|------------------|
| Type        | Constant Current |
| 120V        | 0.20A            |
| 208V        | 0.10A            |
| 240V        | 0.08A            |
| 277V        | 0.07A            |
| Input Watts | 19.3/19.9/19.7W  |

**LED Info**

|                |                        |
|----------------|------------------------|
| Watts          | 20W                    |
| Color Temp     | 3000K/4000K/5000K      |
| Color Accuracy | 80 CRI                 |
| L70 Lifespan   | 100,000 Hours          |
| Lumens         | 2600/2921/2703 lm      |
| Efficacy       | 134.7/146.9/137.2 lm/W |

**Technical Specifications****Field Adjustability****Field Adjustable:**

Color temperature selectable by 3000K, 4000K and 5000K

**Compliance****UL Listed:**

Suitable for wet locations

**IESNA LM-79 & LM-80 Testing:**

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

**IP Rating:**

Ingress protection rating of IP65 for dust and water

**DLC Listed:**

This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.  
DLC Product Code: PLLLMBSHJ6UX

**Performance****Lifespan:**

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

**Wattage Equivalency:**

Equivalent to 100W Metal Halide

**LED Characteristics****LEDs:**

Long-life, high-efficiency, surface-mount LEDs

**Color Uniformity:**

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

**Electrical****Driver:**

Constant Current, Class 2, 120-277V, 50/60 Hz, 120V: 0.20A, 208V: 0.10A, 240V: 0.08A, 277V: 0.07A

**Dimming Driver:**

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

**Photocell:**

120-277V Discreet, integrated button photocell included. Photocell is compatible with 120V-277V.

**Construction****Cold Weather Starting:**

The minimum starting temperature is -40°C (-40°F)

**Ambient Temperature:**

Suitable for use in up to 45°C (113°F)

## Technical Specifications (continued)

### Construction

#### Housing:

Precision die-cast aluminum

#### Mounting:

Heavy duty, die-cast junction box with four (4) conduit entries (one top, two side, one back)

### Finish:

Formulated for high durability and long-lasting color

### Green Technology:

Mercury and UV free. RoHS-compliant components.

### Other


#### 5 Yr Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

#### Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

## Dimensions

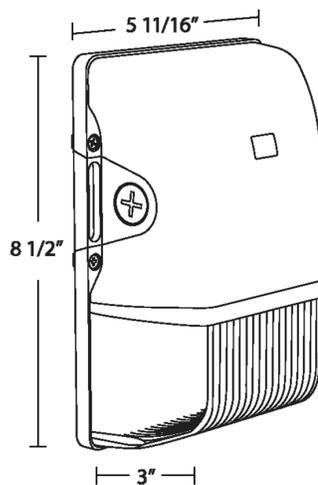

## Features

DLC Premium listed

IP65 Rated

100,000-Hour LED lifespan

5-Year, limited warranty

## Ordering Matrix

| Family    | Wattage  |
|-----------|----------|
| BRISK17FA | 20       |
|           | 20 = 20W |