

NEW!
See
reverse

Slip Meter Riser Fitting

Protects buried conduit in cold climates



Save time and money, and protect non-metallic conduit from damage caused by movement or freeze/thaw cycles with Arlington's new NM2520 slip meter riser fitting.

Easy to install, NM2520 is designed to create an expansion joint in the installation of an electrical service entrance.



NM2520
Patents pending

NM2520 glues onto a 2-1/2" PVC conduit, then attaches to the bottom of a meter enclosure. To complete the installation, slip the 2-1/2" conduit over the 2" non-metallic conduit coming from the ground.

- Meets 2008 NEC 300.7(B)
- Fast, easy underground service installations
- Protects cable from freeze/thaw flexion and ground movement
- UL/CSA Listed

Other sizes coming soon!



1 Stauffer Industrial Park
Scranton, PA 18517
800/233.4717
Fax 570/562.0646
www.aifittings.com

Catalog Number	UPC/DEI/NAED Mfg. #018997	Description Slip Meter Riser Fitting	Conduit Size	Unit Pkg	Std Pkg
NM2520	54565	2" K.O. size	2-1/2"	10	10


Patents pending

Slip Meter Riser Fitting

Protects buried conduit in cold climates



- 1 Glue NM2520 onto 2-1/2" PVC conduit.
- 2 Slip 2-1/2" conduit over 2" non-metallic conduit coming from the ground
- 3 Attach the NM2520 to the bottom of the meter enclosure. 2 to 2-1/2" meter riser fitting holds conduit firmly in place (locknut is not supplied).

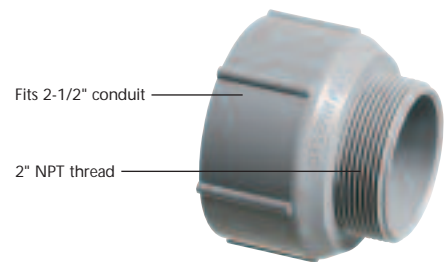

NM2520
Patent pending



1 Stauffer Industrial Park
Scranton, PA 18517
800/233.4717
Fax 570/562.0646
www.aifittings.com

NM2520 0508/50M

Distributed by