

PROOF

NON-METALLIC WHILE-IN-USE COVERS

2-GANG



MM7440C



MM7440G

APPLICATIONS

- Designed for use whenever weatherproof protection is required while an outlet is in use

PRODUCT FEATURES

- High-impact polycarbonate construction provides maximum durability
- Patented Quick-Fit™ keyhole mounting system allows installation in under a minute
- Includes attached gasket and mounting hardware
- Pre-configured for GFCI* with patented Knock-Out™ technology for alternate devices
- Lockable tab
- Made in USA

COMPLIANCES


- UL File E116141
- 2014 NEC® compliant (article 406.9)
- NEMA 3R rated

U.S. Patent 8,314,335

* MM7440 pre-configured for Duplex.
MM2410/MM2420 pre-configured for GFCI.

40ⁱⁿ1

CONFIGURATIONS

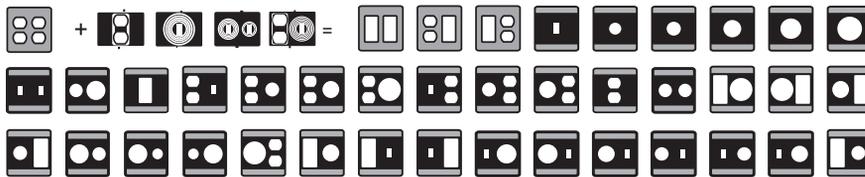

Multiple combinations of duplex, GFCI, switch and rounds: 1-3/8", 1-5/8", 1-3/4", 2-1/4", 2-5/8"



MM2410C



MM2410G




MM2420C



MM2420G

55ⁱⁿ1

CONFIGURATIONS

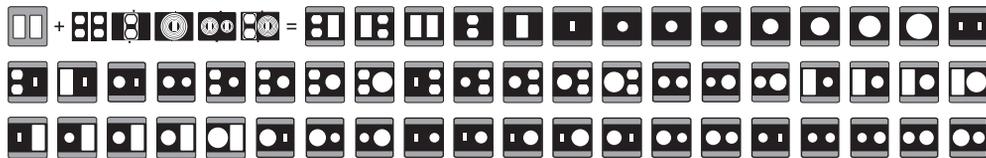

Multiple combinations of duplex, GFCI, switch, and rounds: 1-1/4", 1-3/8", 1-9/16", 1-5/8", 1-11/16", 1-3/4", 2-1/8", 2-1/4", 2-7/16"


CATALOG #	DESCRIPTION	DEPTH	COLOR	PKG. TYPE	STD. PKG.	BARCODE
2-Gang In-Use Covers						
MM7440C	55-in-1 Jumbo	4.75"	Clear	Shrink	3	
MM7440G	55-in-1 Jumbo	4.75"	Gray	Shrink	3	
MM2410C	55-in-1 Standard	2.75"	Clear	Shrink	6	
MM2410G	55-in-1 Standard	2.75"	Gray	Shrink	6	
MM2420C	Extra Duty® 55-in-1 Standard	2.75"	Clear	Shrink	6	
MM2420G	Extra Duty® 55-in-1 Standard	2.75"	Gray	Shrink	6	

SEE END OF SECTION (PG C15) FOR DETAILED DRAWINGS >>




PLASTIC WHILE-IN-USE COVERS


MM720

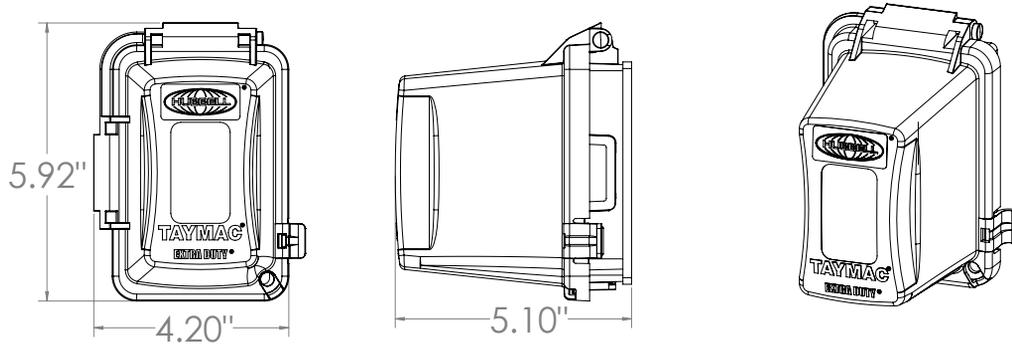

MM7440

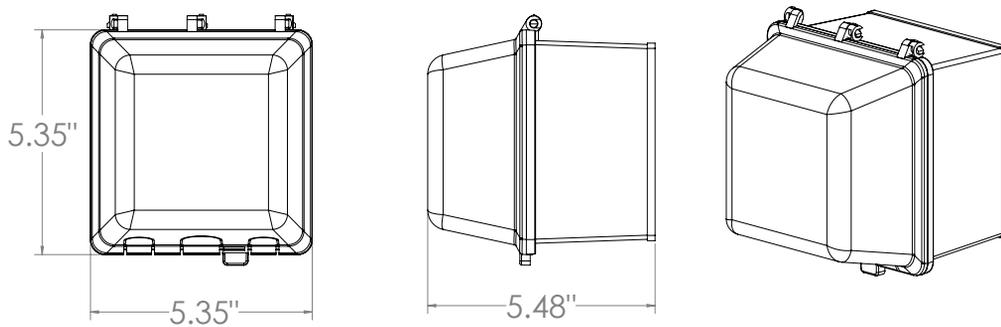

MM2410

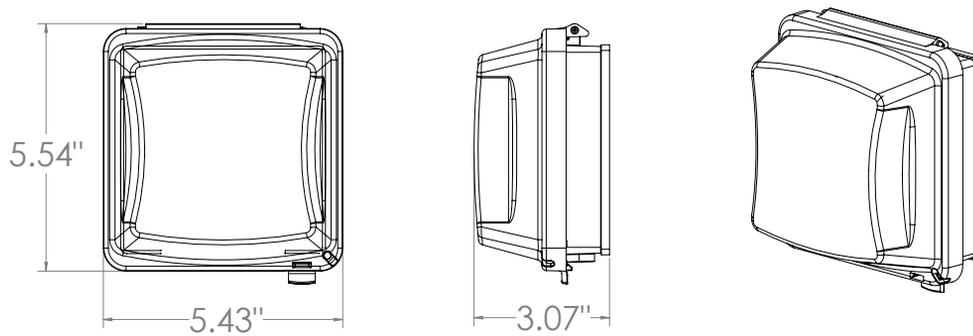

MM2420

