

GROUND ROD DAWG XL™

DRIVE LARGE ROD FROM GROUND LEVEL

iTOOLco.



No Ladder Needed to Drive Rod



End Receiver Drives Top of Rod Below Grade



Fits in 1-1/8" Hex Shank Jack Hammer


FASTER SAFER WORKSPACE

With two models available, safely drive three quarter or one inch rods from ground level with iTOOLco's Ground Rod Dawg XL's. The Ground Rod Dawg XL eliminates the need for climbing up ladders and using sledge hammers to drive large ground rods under grade. Simply plug the Ground Rod Dawg XL into your hex shank jack hammer. Then insert the bottom of the rod into the Ground Rod Dawg XL and go. The unique design allows the Ground rod Dawg XL to bite down onto the rod, allowing the user to drive it in with ease. Once the rod is driven in far enough, use the end receiver on the top of the rod to finish driving it to the final grade level.


GROUND ROD DAWG XL™

DRIVE LARGE ROD FROM GROUND LEVEL

iTOOLco.



1-1/8" HEX SHANK
bit type for demo hammer

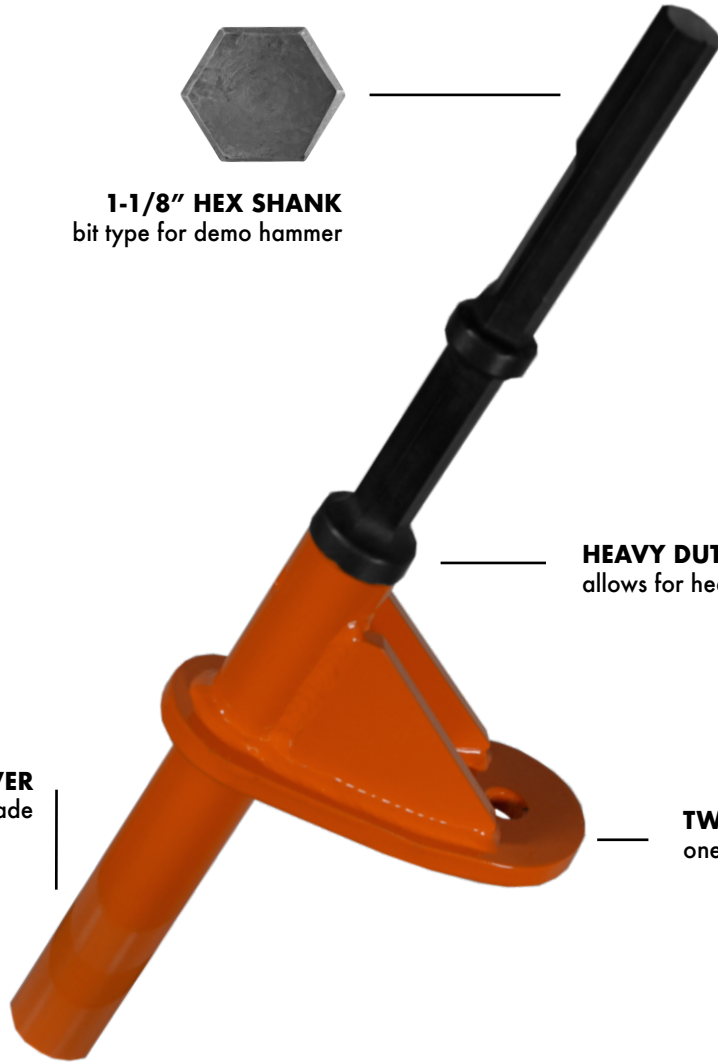

END RECEIVER
drives rod under grade

HEAVY DUTY STEEL CONSTRUCTION
allows for heavy hits to drive in rod

TWO VERSIONS AVAILABLE
one for up to 3/4" & 1" rod

*Sold as shown

Model	Description	Specifications
GRDXL34	Ground Rod Dawg XL™ (Up to 3/4")	4"H x 9-1/2"W x 23"L 18 lb.
GRDXL01	Ground Rod Dawg XL™ (Up to 1")	4"H x 9-1/2"W x 23"L 18 lb.

6
YEAR
LIMITED
WARRANTY

Patent Pending