


## Hub Type

### Images

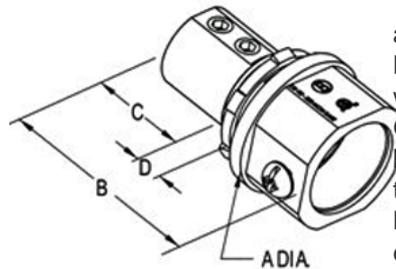

### Application

The MCH-100 is listed for use in wet and dry locations as a connector for rigid metal conduit or EMT with a Bridgeport Fittings connector. The MCH-100 will provide a wet locations seal. Rigid Metallic raceways which contain Ground Electrode Conductors (G.E.C.) are required to be bonded at the enclosure and where the conductor exits the raceway for attachment to the ground electrode. The MCH-100 can be used in both applications: at the enclosure and at the end of the bonding conductor raceway. Patent Pending

### Product Information

Material: Brass

### Certifications & Codes:

Federal

Specification: A-A-50553A

Number:

NEMA

Standard: FB-1

UL File

Number: Listed ETL under Bridgeport Fittings:  
MCH-100. Conforms to UL 467 and  
CSA C22.2 No. 18.3

UL

Standard: 467

UNSPSC: 39121613

Patent

Number: 8,410,378; D703,519

[Download Photo Image](#)

[Download Dimensional Image](#)

Dimension A in Inches: 1.93

Dimension B in Inches: 2.84

Dimension C in Inches: 1.09

Dimension D in Inches: .56

**Catalog ID:** MCH-100

**UPC Number:** 78174702346

**Description:** 1" Brass Alloy grounding fitting with stainless steel set screws and steel locknut Buna N sealing ring. NPT threads

**Application:** The MCH-100 is listed for use in wet and dry locations as a connector for rigid metal conduit or EMT with a Bridgeport Fittings connector. The MCH-100 will provide a wet locations seal. Rigid Metallic raceways which contain Ground Electrode Conductors (G.E.C.) are required to be bonded at the enclosure and where the conductor exits the raceway for attachment to the ground electrode. The MCH-100 can be used in both applications: at the enclosure and at the end of the bonding conductor raceway. Patent Pending

**Trade Size:** 1"

**Std Pkg Qty:** 10

**Unit Qty:** 1