


Grounding - Zinc

Images

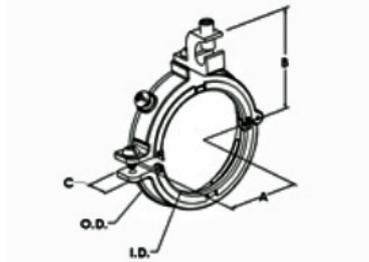

[Download Photo Image](#)

[Download Dimensional Image](#)

Dimension A in Inches: 1.25
Dimension B in Inches: 1.80
Dimension C in Inches: 0.73
Dimension D in Inches: .80
Dimension E in Inches: 1.60

Application

Used in situations where wires have already been pulled through conduit or EMT fittings, and an insulated Grounding bushing is required. Grounding lug; aluminum alloy 60610-T6. Rated 150 Degree C. cULus listed to UL514B and UL467 specifications. Patented. Now featuring UV Stabilized Insulators and Stainless Steel Hardware, perfect for solar and other outdoor installations!

Product Information

Material: Zinc Alloy
Finish: Ball Burnished, Mirror Smooth,
Grounding lug: Tin Electro-plate

Certifications & Codes:

Federal Specification Number: A-A-50553
NEMA Standard: FB-1
UL File Number: E20412
UL Standard: UL514B, UL467
UNSPSC: 39121312
Patent Number: 7,182,611; 6,840,782;
8,419.449

Catalog ID: SGB-382CL

UPC Number: 78174790382

Description: Split Bushing, Insulated, Grounding, Zinc Die Cast, Size 3/4 Inch

Application: Used in situations where wires have already been pulled through conduit or EMT fittings, and an insulated Grounding bushing is required. Grounding lug; aluminum alloy 60610-T6. Rated 150 Degree C. cULus listed to UL514B and UL467 specifications. Patented. Now featuring UV Stabilized Insulators and Stainless Steel Hardware, perfect for solar and other outdoor installations!

Trade Size: 3/4"

Std Pkg Qty: 250

Unit Qty: 25