



FS 41
FASTRUT CONNECTOR



- FASTRUT attaches tray to strut without bolts and nuts or tools.
- Reduces installation time.
- Install FASTRUT on outer wires of tray, and both sides of the strut.
- 2 required for tray 12" or smaller.
- 3 required for tray 18" or larger.

	PKG. QTY.	WEIGHT		DC	316L	BL	PE
		LBS	KG				
FS 41	50	3.3	1.5	599 007	599 004	942 823	942 824

GNDSB
GROUNDING LUG

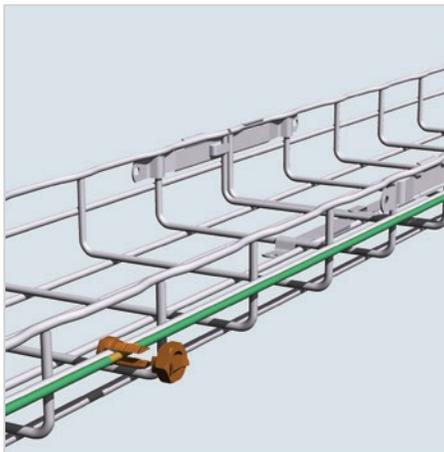

- Accommodates AWG 3-14 grounding wires.
- Use one GNDSB every 60' and/or at the end of each tray run. If tray is used as an Equipment Grounding Conductor, use one on each section of tray for a code compliant installation.
- Works with any size Cablofil tray.
- UL Listed, CSA Approved.

	WEIGHT		CU*
	LBS	KG	UL
GNDSB	0.07	0.03	942 616

*CU= Copper

GNDCL
GROUNDING LUG



- Accommodates AWG 1/0 - #6 grounding wires.
- Use one GNDCL every 60' and/or at the end of each tray run. If tray is used as an Equipment Grounding Conductor, use one on each section of tray for a code compliant installation.
- Works with any size Cablofil tray.
- UL Listed, CSA approved.
- Tin-plated

	WEIGHT		CU*
	LBS	KG	UL
GNDCL	0.2	0.1	942 866

*CU= Copper