


TYPE ND-60

- Features**
- ① • High strength, butting, forged steel jaw
 - ② • Two permanent die grooves
 - ③ • Large diameter hardened steel bolts
 - ④ • Spring loaded positive lock die retainer buttons
 - ⑤ • Orange alignment grooves
 - ⑥ • PTFE[®] impregnated steel backed bronze bushings
 - ⑦ • Over center cam action
 - ⑧ • Adjustment screws
 - ⑨ • Handle butt stops and heat shrink tubing
 - ⑩ • High quality clear hickory handles
 - ⑪ • Bent handles and anti-slip handle grips

- Benefits**
- Assures proper crimps
 - No additional dies required for "BG" and "D₃" size tap connectors. The "D₃" groove accommodates the complete line of type "W-" die inserts.
 - Provides increased strength and greater bearing area
 - Allows fast, easy, one-hand die insertion. No lost dies.
 - Allows easy visual field check for proper tool adjustment
 - Over 90,000 crimps provided with Teflon impregnated steel backed bronze bushings
 - Assures full crimp force
 - Easy tool adjustment with allen wrench screws
 - Operator protection provided with butt stops and heat shrink tubing
 - Long life expectancy provided with select clear hickory handles and light weight high strength aluminum alloy castings
 - Easier tool operation is provided with bent handles and anti-slip grips

Specifications


Crimp Force: 9,000 lbs.
Length: 25-3/8"
Weight: 9 lbs.

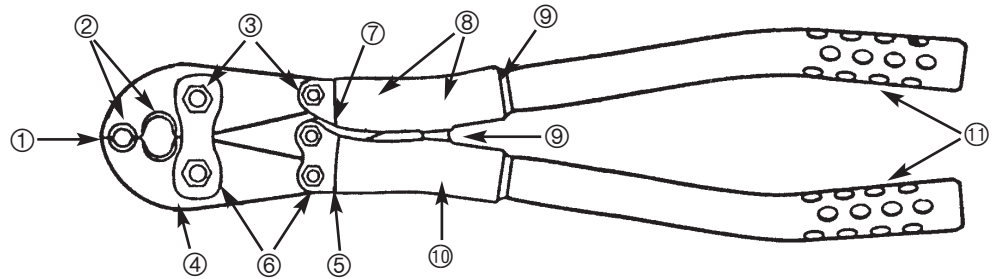

For Use with

Aluminum Connectors	Copper Connectors
PICS Series	GGA-1
P840 Series	GGC-1
UCL 1/0-4	ULT 4-7
UCS 1/0-4	
HT Series	
AH 1-4	

TYPE W DIES FOR
ND-60
ND-58

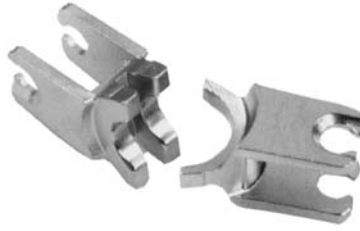

Catalog Number	For Use With	
	Aluminum Compression Connectors	Copper Compression Connectors
ND-0	HT-1, HT-2, AH-1	GGC-1, GGA-1, GGA-2, GGA-4
ND-BG	PICS-61 thru PICS-78	ULT-4, ULT-5
ND-C		ULT-6, ULT-7
ND-K-840	UCS-2/0, UCS-3/0, UCS-4/0, UCS-250, PICS-834 thru PICS-869	