

DATE: _____ LOCATION: _____

TYPE: _____ PROJECT: _____

CATALOG #: _____

CCEL Series

CHICAGO EDGE-LIT EXIT SIGN

FEATURES

- Quick installation
- Full recharge within 24 hours
- AC-on and test switch
- Fully automatic two-stage charger
- Surface or Recessed models with STAIRS or EXIT



Recessed Ceiling Mount

Surface Mount

RELATED PRODUCTS

Ø [CLS Series - Emergency Light](#)

Ø [CLSC Series - Combination Exit/Emergency Light](#)



SPECIFICATIONS

APPLICATION

- The CCEL Series is approved for use in the City of Chicago and can be configured with STAIRS or EXIT to include the directional arrow

CONSTRUCTION

- The surface mount housing is made of extruded aluminum and the recessed in 20 gage steel with satin aluminum or white finish
- The surface mount design can be top, end or ceiling mounted by use of a supplied canopy

INSTALLATION

- The recessed design can be ceiling or wall mounted by selection and includes a back-box
- CCEL Recessed Bar Hanger Kit required for use with CCELR recessed exit when installing in T-Grid ceiling applications

ILLUMINATION

- The CCEL Series offers bright, even and highly reliable LED illumination with direction configurable STAIRS or EXIT acrylic panels

COMPLIANCES

- City of Chicago
- UL Listed for Damp Locations (0C° to 50°C)
- NFPA101
- NEC
- OSHA

WARRANTY

- 5 year full unit warranty
- See [HLI Standard Warranty](#) for additional information

DATE: _____ LOCATION: _____

TYPE: _____ PROJECT: _____

CATALOG #: _____

CCEL Series

CHICAGO EDGE-LIT EXIT SIGN

ORDERING GUIDE

Example: CCELSWE-NP

CATALOG #

CCEL					Panel Code
Model	Mounting Type	Faces	Operation	Finish Color	
CCEL Chicago Edge-Lit Exit Sign	S Surface	S Single	A AC Only	A Aluminum	Single Face Models 3 "EXIT" (no arrows) 6 "EXIT" (right arrow) 9 "EXIT" (left arrow) 12 "EXIT" (double arrow) 2 "STAIRS" (no arrows) 5 "STAIRS" (right arrow) 8 "STAIRS" (left arrow) 11 "STAIRS" (double arrow) Double Face Models 18 "EXIT" (no arrows) 21 "EXIT" (right / left arrow) 24 "EXIT" (double arrow) 17 "STAIRS" (no arrows) 20 "STAIRS" (right / left arrow) 23 "STAIRS" (double arrow)
	R Recessed Ceiling	D Double	E Emergency	W White	
	W Recessed Wall				

Accessories

CCELR-BHK CCEL Recessed Bar Hanger Kit*

Note
* Required for use with CCELR recessed exit when installing in T-Grid ceiling applications

STOCKED OPTIONS

HOUSING

Catalog Number	Description
CCELSWA-NP	Surface, AC, White, No Panel
CCELSWE-NP	Surface, EM, White, No Panel
CCELSWA-NPS	STAIRS, Surface, AC, White, No Panel
CCELSWE-NPS	STAIRS, Surface, EM, White, No Panel
CCELRWA-NP	Recessed, AC, White, No Panel
CCELRWE-NP	Recessed, EM, White, No Panel
CCELRWA-NPS	STAIRS, Recessed, AC, White, No Panel
CCELRWE-NPS	STAIRS, Recessed, EM, White, No Panel
CCELR-WALLKIT	Recessed Wall Mount Kit(EXIT)
CCELR-WALLKIT-STAIRS	Recessed Wall Mount Kit(STAIRS)

Notes:
1. Housing Size is different for EXIT or STAIRS
2. The recessed wall-mount kit is specific for EXIT or STAIRS. Ensure correct selection.
2. Order appropriate housing, then order corresponding panel shown below

PANEL

Catalog Number	Description
CEP3-ENA	EXIT panel, no arrow
CEP6-ERA	EXIT panel, Right Arrow
CEP9-ELA	EXIT panel, Left Arrow
CEP12-EDA	EXIT panel, Double Arrow
CEP18-ENA	Double Face EXIT panel, no Arrow
CEP24-EDA	Double Face EXIT panel, Double Arrow
CEP21-ELARA	Double EXIT panel, Left/Right Arrow
CEP2-SNA	STAIRS panel, no arrow
CEP5-SRA	STAIRS panel, Right Arrow
CEP8-SLA	STAIRS panel, Left Arrow
CEP11-SDA	STAIRS panel, Double Arrow
CEP17-SNA	Double Face STAIRS panel, no Arrow
CEP23-SDA	Double Face STAIRS panel, Double Arrow
CEP20-SLARA	Double Face STAIRS panel, Left/Right Arrow

INPUT POWER REQUIREMENTS


	Input Watts (W)		Input Amps (A)	
	120VAC	277VAC	120VAC	277VAC
AC Models	4.3	4.7	0.040A	0.02A
Emergency Models	4.5	4.9	0.042A	0.02A

CCEL Series


CHICAGO EDGE-LIT EXIT SIGN

SPECIFICATIONS

Single-Face Selections

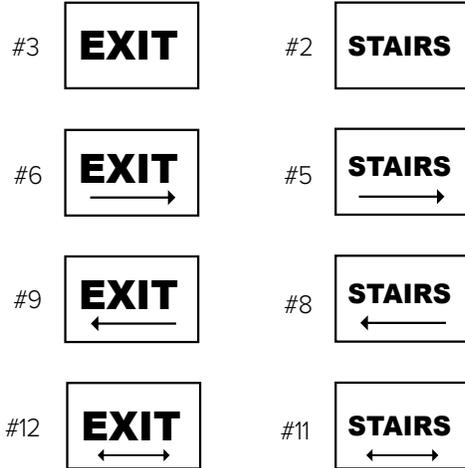


Double-Face Selections

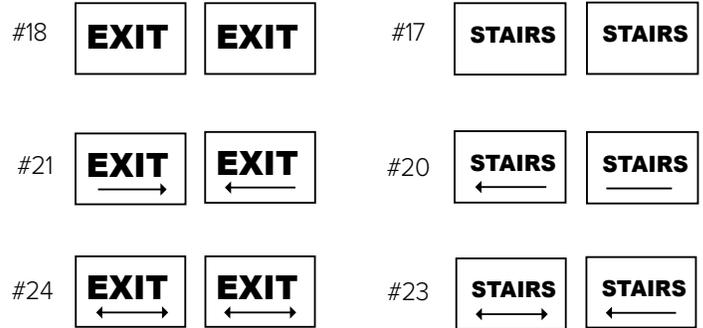


DIMENSIONS

RECESSED MODEL

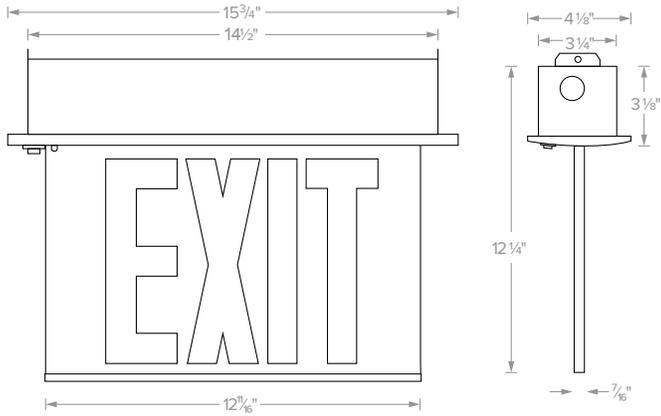

WALL MOUNT MODEL

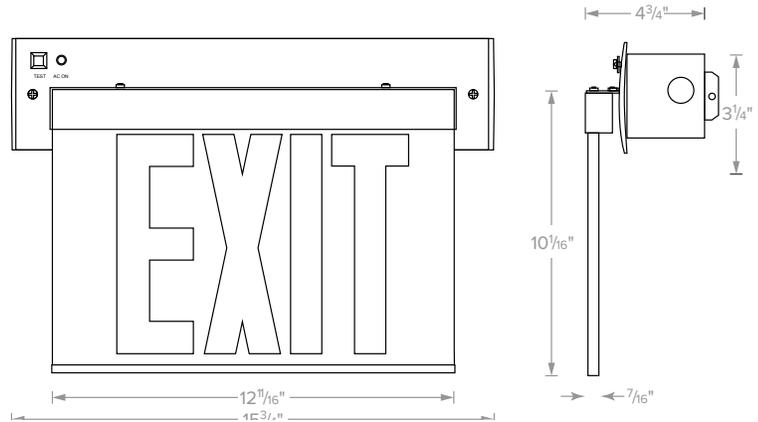

SURFACE MOUNT MODEL

